



PRODUCT CATALOGUE 2022















ABOUT US

Our story started in 1954 in a small workshop with emotion. And now, Palazoglu has become a global player in the sector with our history, experience and innovation.

Palazoglu was founded by Selami PALAZ, now deceased, in 1954 with his futuristic production policy and foresight. "reaching the most users with constant optimisation with better quality than yesterday" was his dream. We are proud to continue to successfully walk in this way








We carry out everything we do here with great care from start to finish with a sense of responsibility of being a global player in the world, and as a leading trailer manufacturer in Turkey. At the same time, we maintain the same production excitement as we did on the first day. And we continue with a perfect combination of excitement, experience, tradition and innovation.

For the first time in Turkey, we started the process of sand blasting and electrostatic powder coating. Because we know that to be an optimisation leader is an assertive job.

The power of production; it is evident from the products offered by providing high precision controls at every stage. In this way, palaz's signature speaks for itself in the sector. WE ARE SURE ABOUT OUR QUALITY because we carry out all processes ourselves. We are proud to serve our global network across 4 continents.

We are serving our network with 2 modern factories, both manufacturing different product lines. The synchronisation of the two factories, our professional attitude towards "before" and "after" sales and innovative production strategy are the reason for our success. OUR WIDE RANGE OF PARTNER NETWORKS AND THOUSANDS OF HAPPY CUSTOMERS ARE PROOF OF THAT.

TABLE OF CONTENTS

SINGLE AXLE TIPPER TRAILERS		10
DOUBLE AXLE TIPPER TRAILERS		12
TANDEM AXLE TIPPER TRAILERS		14
3 AXLES TIPPER TRAILERS		16
SINLE AXLE DUMP TRIALERS		20
TANDEM AXLE DUMP TRIALERS		22
TRIDEM AXLE DUMP TRAILERS		24

SINGLE AXLE MANURE SPREADER TRAILER



28

TANDEM AXLE MANURE SPREADER TRAILER



30

BALE TRAILERS



34

SINGLE AXLE SLURRY TANKS




38

TANDEM AXLE SLURRY TANKS



40

WATER TANKS



44

OTHER PURPOSES



48



HIGHLIGHTS

LIGHTWEIGHT DESIGN

The right material of choice with optimum calculation for maximum efficiency. The strongest and lightest.

SOLID CONSTRUCTION

Triangular chassis type made of closed profiles which make the trailer durable, solid and resistant to deformation.

FUNCTIONAL

High maneuverability of the trailer makes it easy to maneuver, while a large tipping angle provides excellent unloading regardless of the type of material.



SINGLE AXLE TIPPERS

Small in appearance, big in performance.

When it comes to functionality and performance, they are in no way inferior to their bigger brothers. With its single axle type, it primarily appeals to small and part-time farmers, as well as urban communities that value maneuverability and low deadweight. This series is characterized above all by its small width and low height and is therefore a reliable partner for many jobs in the forest, field and garden area.

pariatur.



TYPES



RR1U35B



RR1U04L



RR1U05L



RR1U06L



RR1U08B

Product Code	RR1U35B	RR1U04L	RR1U05L	RR1U06L	RR1U08B
Payload	3.500 kg	4.000 kg	5.000 kg	6.000 kg	8.000 kg
Volume	2.3 m ³	5.0 m ³	5.6 m ³	6.6 m ³	10.5 m ³
Lenght Of Platform	3.000 mm	3.300 mm	3.500 mm	3.500 mm	3.800 mm
Width Of Platform	1.900 mm	1.900 mm	2.000 mm	2.100 mm	2.300 mm
Height Of Sideboard	400 mm	400 mm	400 mm	500 mm	600 mm
Height Of Extension	-	400 mm	400 mm	400 mm	600 mm
Wheels	11,5/80-15,3	11,5/80-15,3	400/60-15,5	400/60-15,5	500/50-17
Chassis Profile	80X200X4	80X200X4	80X200X5	80X200X5	80X200X6



HIGHLIGHTS

FUNCTIONAL

Loading box which is design developed on base of multitasking allows you for all agriculture transportation solutions. Platform made by 4 mm high quality steel and reinforced with bottom beams.

LEAK PROOF

Sidewalls have sealed frame which includes along to platform and side columns. Sponge has long lifetime therewithal it is changeableiusmod tempor incididunt ut labore et dolore magna

WIDE RANGE OF OPTIONS

Palaz Trailers have many options which are totally focused to make your job easier. You can check us on web to see options like hydraulic door, sidewall spring, grain auger, tent, galvanized chassis etc.



DOUBLE AXLE TIPPERS

Increasing transportation demands in modern agriculture need efficient solutions. For maximum transport service under strict preconditions the RD2U tipping trailer is extremely suitable. A calm road performance, an efficient use of loading capacity and high authorized speed are essential. The parabolic suspension and the wide track provide an even load on the axes on extremely fast drives.



TYPES



RD2U06B




RD2U08B



RD2U10B



RD2U12B



RD2U15B - RD2U12L



RD2U10L

Product Code	RD2U06B	RD2U08B	RD2U10B	RD2U12B	RD2U15B*	RD2U10L	RD2U12L
Payload	6.000 kg	8.000 kg	10.000 kg	12.000 kg	15.000 kg	10.000 kg	12.000 kg
Volume	7,7 m3	10,1 m3	12,7 m3	14,8 m3	19,1 m3	15,5 m3	17,9 m3
Lenght Of Platform	4.100 mm	4.600 mm	4.600 mm	4.600 mm	5.200 mm	5.200 mm	5.200 mm
Width Of Platform	2.100 mm	2.200 mm	2.300 mm	2.300 mm	2.300 mm	2.300 mm	2.300 mm
Height Of Sideboard	500 mm	500 mm	600 mm	800 mm	800 mm	700 mm	800 mm
Height Of Extension	400 mm	500 mm	600 mm	600 mm	800 mm	600 mm	700 mm
Wheels	400/60-15,5	400/60-15,5	385/65-22,5	385/65-22,5	385/65-22,5	385/65-22,5	385/65-22,5
Chassis Profile	80X200X4	80X200X5	100X200X6	100X200X6	100x200x8	100X200X6	100x200x6



HIGHLIGHTS

EASY TO MANEUVER

Easy maneuvering the trailer by using the suspension of tandem type. Through its compact building method the driving unit enables high manoeuvrability and ensures above all maximal stability and safety when loading, discharging and driving.

RELIABLE

Chassis frame have reliable and powerful tripartite tipping system and reinforced withstanding extreme loads drawbar with hydraulic scissor-type support. SJ355 quality carbon inside steel makes it much more stronger then ever.

GENTLE

Due to tandem suspension which not only distributes the load on the wheels of the trailer but also on the tractor hitch, it is perfect to work in difficult terrain, when dealing with soft ground, including green areas and work related to municipal services.



TANDEM AXLE TIPPERS

Tandem vehicles are made for on the road or offroad. To provide safe transport of high payloads on difficult terrain it requires the convincing features of our RR2U three-side tandem trailer. Through its compact building method the driving unit enables high manoeuvrability and ensures above all maximal stability and safety when loading, discharging and driving. we offer excellent handling characteristics, the use of high support weight, low heights and spring support on each axle.



TYPES



RR2U06B



RR2U08B



RR2U10B



RR2U12B



RR2U15B - RR2U12L



RR2U10L

Product Code	RR2U06B	RR2U08B	RR2U10B	RR2U12B	RR2U15B	RR2U10L	RR2U12L
Payload	6.000 kg	8.000 kg	10.000 kg	12.000 kg	15.000 kg	10.000 kg	12.000 kg
Volume	7,7 m ³	10,1 m ³	12,7 m ³	14,8 m ³	19,1 m ³	15,5 m ³	17,9 m ³
Lenght Of Platform	4.100 mm	4.600 mm	4.600 mm	4.600 mm	5.200 mm	5.200 mm	5.200 mm
Width Of Platform	2.100 mm	2.200 mm	2.300 mm	2.300 mm	2.300 mm	2.300 mm	2.300 mm
Height Of Sideboard	500 mm	500 mm	600 mm	800 mm	800 mm	700 mm	800 mm
Height Of Extension	400 mm	500 mm	600 mm	600 mm	800 mm	600 mm	700 mm
Wheels	400/60-15,5	400/60-15,5	400/60-15,5	500/50-17	500/50-17	500/50-17	500/50-17
Chassis Profile	80X200X4	80X200X5	100x250x5	100x250x5	100x250x6	100x250x5	100x250x5



HIGHLIGHTS

HIGH-PERFORMANCE

Highest operating comfort and long working life is the basis of modern agriculture. The model RD3U meets the highest demands in terms of quality, performance and features.

SAFETY ROAD

Heavy duty axles with 10 studs and 400x120 brake shoes allows you short brake distance even with full loaded. Tires are selected for road performance.

EASE OF USE

The chassis of the RD3U is fitted on a running gear with parabolic leaves. It guarantees flexibility and high operating comfort, both in the field and on the road, even under the most difficult conditions. A lowered chassis provides a lower centre of gravity, which results in a better machine stability and an increased driving comfort, both on the road and in the field. In addition, the lowered body makes loading easier.



3 AXLE TIPPERS

Our three axle tipper offer enormous payload with the highest possible flexibility. Guarantees economical transport and reduce production costs. It is ideal for the transport of agricultural crops. Tires and axles are designed to transport on roads for long distances at a speed of 40 km / h. The standard springs for easy opening allow the trailer to be operated efficiently of by one person.



TYPES



RD3U24B

Product Code	RD3U24B
Payload	24.000 kg
Volume	25,8 m3
Lenght Of Platform	7.000 mm
Width Of Platform	2.300 mm
Height Of Sideboard	800 mm
Height Of Extension	800 mm
Wheels	385/65-22,5
Chassis Profile	150X250X10

TECHNICAL INFORMATION



2,5 mm Sidewalls

All PALAZ trailers have 2,5 mm sidewalls & extension (additional) for heavy conditions. Profile of sidewalls are makes it much more stronger. There is tension chain between 2 sidewalls and tension bar all among to sidewall length as a standard. All sidewalls are PALAZ made and design.



Powder Coating

Powder coating is a type of coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint which is delivered via an evaporating solvent, powder coating is typically applied electrostatically and then cured under heat or with ultraviolet light. It is usually used to create a hard finish that is tougher than wet paint.



Axle And Suspension

Parabolic suspension is standard for most of models (Depends on road regulations in countries). Axle is made by ST-52 quality profile. In the name of robustness, it achieves integrity with the st-52 chassis. Thus, the weight-bearing construction is secured with the ST-52 quality thick profiles. Does not worry you with its durability, It adapts to all conditions with its flexibility.



Central Locking System

Sideboards are equipped with steel casting hinges. Steel casting does not allow bending depends on usage during time. That means Palaz users do not face with leaking problem for sideboards.



Sandblasting

Palazoglu supply raw material for production. Sandblasting can remove rust, and residue from oxidation from materials quickly and efficiently. And the process of sandblasting creates a surface that is prepped and ready to accept a new finish or coating.



Chassis

Sturdy frame made from ST-52 steel profile for durability and safety. Triangle form allows you balance during transportation and unloading in any terrain. ST-52 Steel profile is placed at the most critical part of chassis also; tipping cylinder beams.



HIGHLIGHTS

SAFE CONSTRUCTION

The trailer is safe thanks to its stable construction with low center of gravity and functional load box construction. The high standard of safety is also maintained by the use of rear overhang protection, metal shields over the wheels and ladders.

CORROSIVE PROTECTION

Two-layer varnish system (primer + paint) is applied. The system with the use of two-component chemotherapeutic paint materials gives high corrosion resistance, high durability of coatings and UV resistance.

TIPPING

50 degrees backward tipping capacity will allow you to slide your goods without effort.




SINGLE AXLE DUMPERS

Small in appearance, big in performance.

When it comes to functionality and performance, they are in no way inferior to their bigger brothers. With its single axle type, it primarily appeals to small and part-time farmers, as well as urban communities that value maneuverability and low deadweight. This series is characterized above all by its small width and low height and is therefore a reliable partner for many jobs in the forest, field and garden area.



TYPES



RR1C05B



RR1C08B

Product Code	RR1C05B	RR1C08B
Payload	5.000 kg	8.000 kg
Volume	6,3 m ³	9,9 m ³
Lenght Of Platform	3.500 mm	3.800 mm
Width Of Platform	2.000 mm	2.000 mm
Height Of Sideboard	900 mm	900 mm
Height Of Extension	-	400 mm
Wheels	12,5/80-15,3	500/50-17
Chassis Profile	80X200X6	80X200X6



HIGHLIGHTS

STRONG

The chassis frame in T669XL is made of rectangular closed profiles that can carry complex loads. Such implementation prevents structure from bending and twisting and thus affects the high stability of the vehicle when working in difficult terrain. In the tandem suspension, exceptionally strong parabolic springs and axles were designed for speed of up to 40 km/h.

TIGHT

It doesn't need any additional sealing.

EFFICIENT

Large load capacity and quick and easy loading and unloading. These qualities have always characterized our dumper.



TANDEM AXLE DUMPERS

The RR2C dump tipper is perfect for transporting all agricultural goods, especially for silage, grain, wood chips and other loose bulk materials. The conical bridge ensures a very high elasticity of a rapid and complete emptying. Even heavy material such as sugar-beet, sand, gravel and mud are no hindrance for the RR2C. The dump tipper is usable and guaranteed to work with highest thrift and offers maximum safety and efficiency through the entire year.



TYPES



RR2C08B



RR2C10B



RR2C12B



RR2C15B



RR2C18B

Product Code	RR2C08B	RR2C10B	RR2C12B	RR2C15B	RR2C18B
Payload	8.000 kg	10.000 kg	12.000 kg	15.000 kg	18.000 kg
Volume	10,2 m ³	11,9 m ³	16,8 m ³	19,6 m ³	24,8 m ³
Lenght Of Platform	4.250 mm	4.500 mm	4.500 mm	5.000 mm	6.000 mm
Width Of Platform	2.000 mm	2.200 mm	2.200 mm	2.300 mm	2.300 mm
Height Of Sideboard	1.200 mm	1.200 mm	1.200 mm	1.200 mm	1.200 mm
Height Of Extension	-	-	500 mm	500 mm	600 mm
Wheels	400/60-15,5	500/50-17	500/50-17	500/60-22,5	600/50-22,5
Chassis Profile	100x200x6	100x200x6	100x200x6	100x200x8	100x250x8



HIGHLIGHTS

EASY TO MANEUVER

Standard free steering rear axle allows easy to maneuver even high load capacities long body.

STRUCTURE

Load-bearing components made of high-strength steel rectangular profiles form a very stable construction. Low center of gravity ensures high stability during driving and unloading and thus very safe operation..

DRAWBAR

The trailer uses a powerful drawbar, with a load capacity of 3000kg, cushioned with steel compression spring screws, adapted for extreme operating conditions.



TRIDEM AXLE DUMPERS

PALAZ trailer RR3C is the latest model of tandem tipping trailer in PALAZ's offer. PALAZ trailer RR3C is trailer with a robust construction made of high-quality materials, large carrying capacity and a functional well sealed body with hydraulic tailgate with rubber seals what makes the trailer suitable for large farms. The trailer's construction is universal, equipped with a strong, stable chassis with 3t drawbar with shock absorber and tandem suspension on four parabolic springs.



TYPES



RR3C28B

Product Code	RR3C28B
Payload	28.000 kg
Volume	33,1 m3
Lenght Of Platform	8.000 mm
Width Of Platform	2.300 mm
Height Of Sideboard	1.200 mm
Height Of Extension	600 mm
Wheels	600/50-22,5
Chassis Profile	150x250x10

TECHNICAL INFORMATION



BODY

4mm reinforced body is made for all heavy duty conditions. Shape of body allows stability and balance during transport and easy discharge. ST-37 Quality steel makes body durable for years. Complete closed sides and perfectly fitting rear door is make this body like a pool and does not make you face with leaking problems even for fruit etc. load.



HYDRAULIC REAR DOOR

Rear door is controlled by hydraulic pistons. Driver can complete operation of discharging in tractor cabin and does not need to go trailer. This system makes you save for time.



BODY

4mm reinforced body is made for all heavy duty conditions. Shape of body allows stability and balance during transport and easy discharge. ST-37 Quality steel makes body durable for years. Complete closed sides and perfectly fitting rear door is make this body like a pool and does not make you face with leaking problems even for fruit etc. load.



AXLE

Rear door is controlled by hydraulic pistons. Driver can complete operation of discharging in tractor cabin and does not need to go trailer. This system makes you save for time.



CHASSIS

Sturdy frame made from ST-52 steel profile for durability and safety. Triangle form allows you balance during transportation and unloading in any terrain. ST-52 Steel profile is placed at the most critical part of chassis also; tipping cylinder beams.



FREE STEERING AXLE

When the trailer follows the tractor in a curve, the wheel castor ensures the wheels to turn in accordance with the curve radius. The wheels on self-steer auxiliary axles swivel, allowing them to steer themselves by following the path of least resistance.



HIGHLIGHTS

Construction

Upper frame is welded to the lower frame and together they create stiff and reliable construction.

PRECISION

Exact dosage of the fertilizer – thanks to the hydraulic control of the conveyor speed is adjusted smoothly (stepless) in the whole range.



SINGLE AXLE MANURE SPREADER

Excellent choice for small farms. One axle manure spreader is the smallest in our offer. Adapter with two vertical beaters allows to spread all kinds of manure, lime, compost. Spreading blades are screwed so it's easy to change them. Construction of loading box allows a fast opening of side walls. Unloading system consist of chains made of wear-resistant steel connected to crossbars.



TYPES



RR1K04B



RR1K05B



RR1K08B

Product Code	RR1K04B	RR1K05B	RR1K08B
Loading Capacity	4.000 kg	5.000 kg	8.000 kg
Volume	2,4 m ³	3,4 m ³	6,1 m ³
Lenght Of Body	3.200 mm	3.200 mm	3.500 mm
Width Of Body	1.500 mm	1.500 mm	1.750 mm
Height Of Sideboard	500 mm	500 mm	500 mm
Height Of Extension	-	-	100 mm Wood
Wheels	12,5/80-15,3	400/60-15,5	500/50-17



HIGHLIGHTS

Conveyor Drive

Hardened chain drive transports manure to spreaders. It is possible to adjust conveyor speed.

PRECISION

Exact dosage of the fertilizer – thanks to the hydraulic control of the conveyor speed is adjusted smoothly (stepless) in the whole range.



TANDEM AXLE MANURE SPREADER

With models RR2K, these new machines are suitable to large farms, machine cooperatives, agricultural service contractors, as well as users in other industries. The sturdy self-supporting body has a vertical spreader unit and tightly sealing volume flap for silage transport.



TYPES



RR2K10B



RR2K12B



RR2K15B



RR2K18B


Product Code	RR2K10B	RR2K12B	RR2K15B	RR2K18B
Loading Capacity	10.000 kg	12.000 kg	15.000 kg	18.000 kg
Volume	8,2 m ³	9,5 m ³	11,6 m ³	15,1 m ³
Lenght Of Body	4.250 mm	4.500 mm	4.750 mm	5.000 mm
Width Of Body	1.750 mm	1.750 mm	1.750 mm	2.150 mm
Height Of Side-board	1000 mm	1.100 mm	1.300 mm	1.300 mm
Height Of Extension	100 mm Wood	100 mm Wood	100 mm Wood	100 mm Wood
Wheels	400/60-15,5	500/50-17	500/50-17	500/60-22,5

TECHNICAL INFORMATION




CONVEYOR CHAINS

14.50 Calibrated chains are transporting conveyor. You can adjust tension of chains from adjusting bearing with is placed on front.

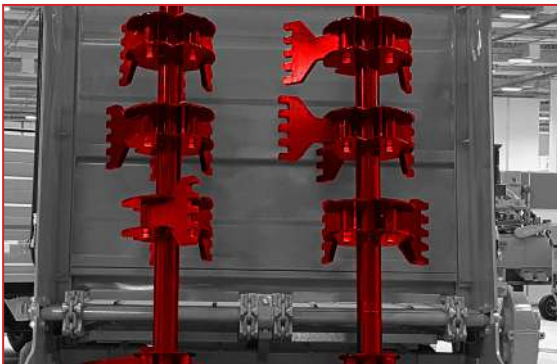

ROTORS

2 pcs vertical rotors are spreading manure with 20 mm plates. Plates are shredding manure even if they got dry as a big blocks so spread them homogeneity and allows you perfect fertilizing.

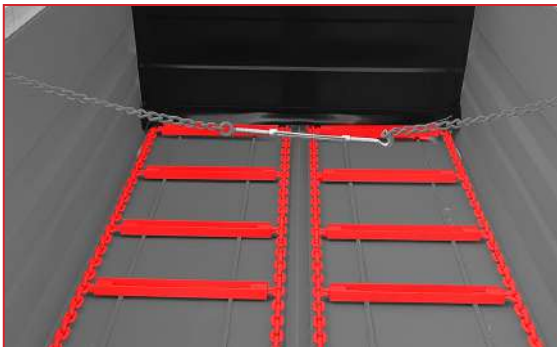

CONVEYOR TIPPING

Conveyor is transporting manure to rear spreader. Strong chains designed for unexpected surprises like little Stones help you in any case. You can adjust conveyor speed for field conditions and your requirement.



WOOD EXTENSION

It is possible to face some crash problems with shovel during loading. Therefore wood extension is placed to top of iron extension of manure spreader trailer. If it's damaged, easy to change.



HYDRAULIC REAR DOOR

You can adjust height of spreading level with hydraulic controlled rear door. Door is designed to work between floor and top of sideboards height and it allows you to work with wide range of height level.



HIGHLIGHTS

Durable

Light, stable construction and optimal floor thickness.

Comfort

Low center of gravity of the trailer loaded with bales significantly increases stability and smooth driving.



PLATFORM TRAILER

Platform is bale transportation trailer – reliable, failure-free and universal. Perform excellently when transporting cargo volume requiring large, straight surfaces, mainly to transporting straw or hay/silage bales, pallets and euro-pallets. Low bed construction with flat edges facilitates loading and protect film-wrapped bales against damaging them. This option significantly increases the functionality of the trailer. Extended rear frame adjusting it to the load parameters. Chemically hardened and UV-resistant painting materials provides protection against corrosion. Stable and strong parabolic spring suspension provides longer service



TYPES



RD2B08B



RD2B10B



RD2B14B



RR2B10B



RR2B12B



RR2B15B



RD2B16B



RD2B20B


Product Code	RD2B08B	RD2B10B	RD2B14B	RR2B10B	RR2B12B	RR2B15B	RD2B16B	RD3B20B
Gross Weight	2.500 kg	3.000 kg	3.500 kg	2.600 kg	2.900 kg	3.600 kg	4.200 kg	4.900 kg
Loading Capacity	8.000 kg	10.000 kg	14.200 kg	10.000 kg	12.000 kg	15.000 kg	16.800 kg	16.100 kg
Lenght Of Body	6.000 mm	8.000 mm	8.500 mm	6.500 mm	8.000 mm	8.400 mm	9.600 mm	9.900 mm
Width Of Body	2.400 mm	2.400 mm	2.400 mm	2.400 mm	2.400 mm	2.400 mm	2.400 mm	2.400 mm
Wheels	400/60-15,5	400/60-15,5	435/50-19,5	400/60-15,5	500/50-17	435/50-19,5	500/50-17	435/50-19,5

TECHNICAL INFORMATION



4 MM PLATFORM

All range of bale trailers have 4 mm platform thickness, ST-52 Profile chassis and ST-52 Profile axles. That means your bales are transporting on strong, stable and balanced trailer. This drive will be more comfortable and safe.

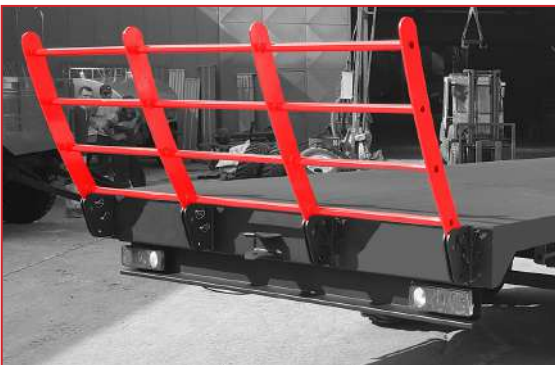

CURVED BARRIER

Curved barriers will fit with your roll bales and keep them during all transport time. Barriers can open up to 1800 angle and become a spare loading surface for you.



SIDE LOCKING SYSTEM

Side Wings can move vertical and horizontal. Move them up when you are starting to loading. If you need larger loading area move Wings left and right to reach larger area. And move them down when you complete loading operation. Wings will lock your bales during all transportation period. Enjoy with your safety and comfortable drive.



LASHING HOLDER

If would you like to take extra prevention and decide to put belts on your bales, our lashing strap holders are placed on each side of bale trailer. If you check you will see that there are enough pieces of holders on trailer




SQUARE BARRIER

Square barriers will fit with your square bales and keep them during all transport time. Barriers can open up to 180° angle and become a spare loading surface for you.



TOP LOCKING SYSTEM

Top Equipment can move down and up. Equipment has nails which are goes into bales and hold them. Move locking part up and start loading. zve locking part down and see how nails are locking bales for safety after loading completed.

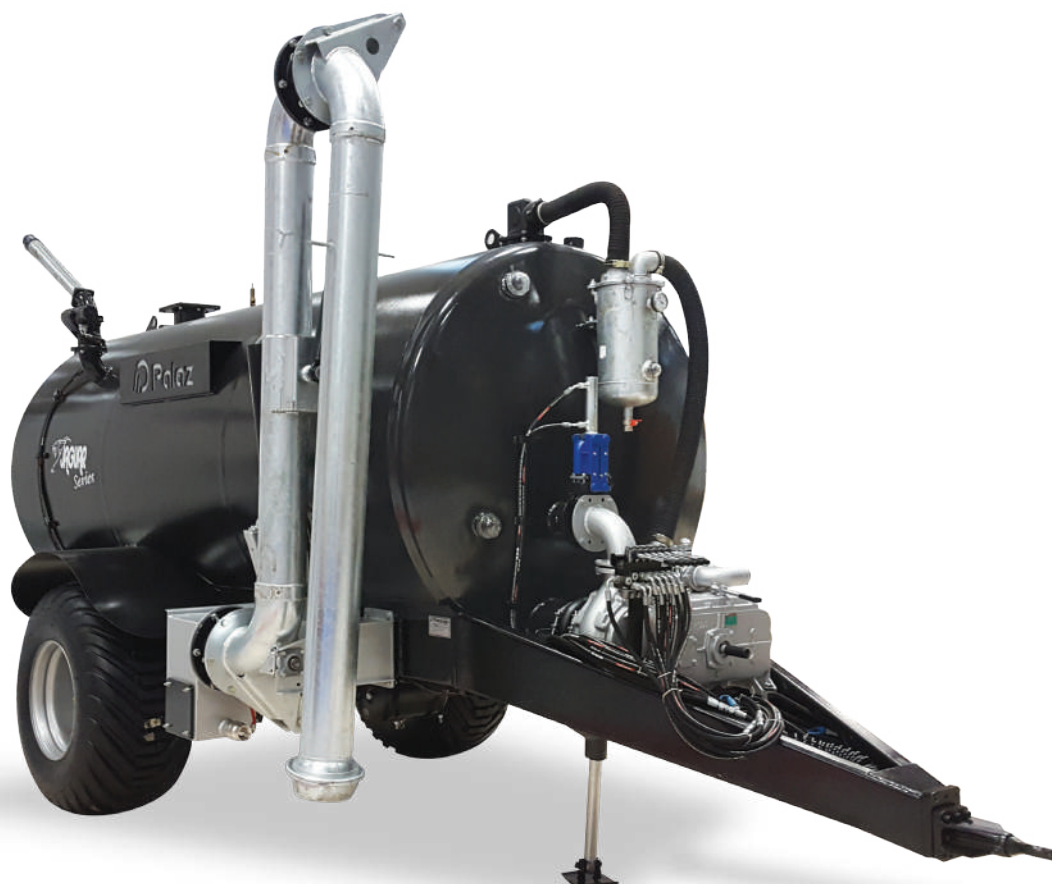

HIGHLIGHTS

HIGH PERFORMANCE PUMP

Equipped with high pressure / Vacuum pump to save your time for operations.

HYDRAULIC REAR VALVE

Allows you to open / close for spreading valve without leaving in the cabinet of tractor.

SAFETY

Tanks are equipped with over pressure and depression valve to secure users against wrong usage.



SLURRY TANK

Slurry tanks are an exceptionally durable constructions, high resistance to corrosion and multifunctionality are just some of the advantages of our slurry trucks. Customers can choose between three available tank capacities made of steel with improved strength properties. The construction of the lower frame ensures that the container does not transfer load as is the case with cars self-supporting. has an inner partition 'breakwater', the aim of which is to prevent a substance from waving. Vehicles have a double protection system which secures the pump from flooding. A special overpressure valve helps to avoid too high pressure.



TYPES




TRIS32



TRIS05



TRIS08



TRIS10

Product Code	TRIS32	TRIS05	TRIS08	TRIS10
Loading Capacity	3.200 kg	5.000 kg	8.000 kg	10.000 kg
Number Of Axle	1	1	1	1
Thickness Of Tank	4 mm	4 mm	4 mm	6 mm
Pump	Vacuum Pump	Vacuum Pump	Vacuum Pump	Vacuum Pump
Wheels	12,5/80-15,3	400/60-15,5	500/60-22,5	600/50-22,5



HIGHLIGHTS

HIGH PERFORMANCE PUMP

Equipped with high pressure / Vacuum pump to save your time for operations.

HYDRAULIC REAR VALVE

Allows you to open / close for spreading valve without leaving in the cabinet of tractor.

SAFETY

Tanks are equipped with over pressure and depression valve to secure users against wrong usage.



SLURRY TANK

Slurry tanks are an exceptionally durable constructions, high resistance to corrosion and multifunctionality are just some of the advantages of our slurry trucks. Customers can choose between three available tank capacities made of steel with improved strength properties. The construction of the lower frame ensures that the container does not transfer load as is the case with cars self-supporting. has an inner partition 'breakwater', the aim of which is to prevent a substance from waving. Vehicles have a double protection system which secures the pump from flooding. A special overpressure valve helps to avoid too high pressure.



TYPES



TR2S06



TR2S08



TR2S10




TR2S15



TR2S20

Product Code	TR2S06	TR2S08	TR2S10	TR2S15	TR2S20
Loading Capacity	6.000 kg	8.000 kg	10.000 kg	14.500 kg	20.000 kg
Number Of Axle	2	2	2	2	2
Thickness Of Tank	4 mm	4 mm	4 mm	4 mm	6 mm
Pump	Vacuum Pump	Vacuum Pump	Vacuum Pump	Vacuum Pump	Vacuum Pump
Wheels	400/60-15,5	400/60-15,5	400/60-15,5	500/50-17*	600/50-22,5

TECHNICAL INFORMATION

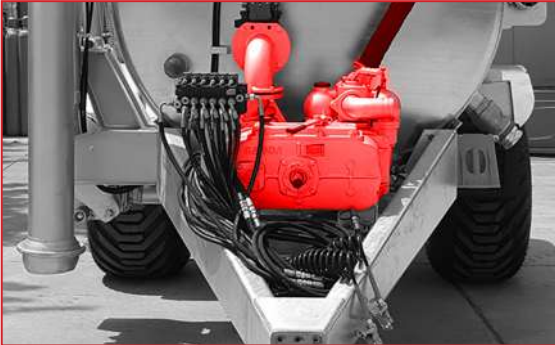

GARDA PUMP

Garda pump is equipped for top swivel spreader gun.



HYDRAULIC SUCTION PIPE

Hydraulic suction pipe has its own valve with knife. It does not let sticking problems. Pipe can reach 4 meters deep. That means you can use your slurry pool effectively.



TOP SWIVEL SPREADER GUN

It can be activated and stop with hydraulic control and turning 360° angle working with high pressure spreading.



VACUUM PUMP

Slurry tankers are equipped with vacuum pump regarding their capacity. Users can use pumps for suction and spreading operations. There are over pressure and depression valves for safety. That means users will just focus on their jobs. PALAZ tankers will take preventions.



PTO SHAFT

All tankers has their PTO shafts which are suitable with their Equipments.



SPREADER

Slurry tank is spreading with spoon type spreader which is combined with hydraulic valve. Users can adjust their spreading diameter and height with adjustable spoon. Spreading can be controlled (Start/ Stop) in tractor cabin thanks to the hydraulic valve.



HIGHLIGHTS

Galvanized Sheet

Barrels made by galvanized steel for long life time.

Centrifugal Pump

Pump is working with PTO. PTO is a standard equipment of tanks. You can fill and discharge the tank with same pump.



WATER TANK

Water tanks are solution for territories which have irrigation and water problems. 2" centrifugal pump allows you blow water from a water supply and squirt to target. 2" centrifugal pump Works with tractor tail shaft. PTO shaft is standart equipment to take power from tail shaft. Motopomp is stronger than basic pump for who needs Professional support. Gasoline and fuel motopomps are with you when you do not have tail shaft. Tank is galvanized designed for corrosion. Manual pump, extra valves, irrigation bar is some of options for that product.



TYPES



RR1W05



RR1W08



RR2W06



RR2W10



RR2W15



RR2W20

	TEK DİNGİL		TANDEM				
Product Code	RR1W05	RR1W08	RR2W06	RR2W08	RR2W10	RR2W15	RR2W20
Loading Capacity	5.000 kg	8.000 kg	6.000 kg	8.000 kg	10.000 kg	14.500 kg	20.000 kg
Number Of Axle	1	1	2	2	2	2	2
Thickness Of Tank	2,5 mm	2,5 mm	2,5 mm	2,5 mm	4 mm	4 mm	6 mm
Pump	2" Centrifugal	2" Centrifugal	2" Centrifugal	2" Centrifugal	2" Centrifugal	2" Centrifugal	2" Centrifugal
Wheels	12,5/80-15,3	500/50-17	400/60-15,5	400/60-15,5	400/60-15,5	500/50-17	600/50-22,5

TECHNICAL INFORMATION



Centrifugal Pump

Centrifugal pump is equipped with PTO shaft which is suitable with it and take power from tractor PTO. This pump has 2" exit. You can discharge and load water with standard pump.



Galvanized Tank

All product range of tanks have 2,5 or 4 mm galvanized sheet (depends on loading capacity) except for over 15 tons. Over 15 Tons loading capacity tanks have 6 mm black metal tank.



Suction Pipe

2" Suction and discharge pipe allows you to fill the tank from river, lake, water storage etc. And discharge it to where ever you wish.



PTO SHAFT

PTO shaft is one of standart Equipment of tanks. It should be connected to tractor and centrifugal pump to use water tank effective. Please take care attentions on PTO shaft!

OTHER PURPOSES



COTTON TRAILER



WOOD TRAILER



HORSE CARRYING



LIVE STOCK TRAILER



Plant No 1

İbrikdere Mah. 13. Sokak No:1
Kartepe/**KOCAELİ**-TURKIYE

Plant No 2

Çubuklubala Mah. Bayhan Sokak No:2
İzmit/**KOCAELİ**-TURKIYE



+90 **262** 361 60 82



info@**palazoglu**.com



www.**palaztrailers**.com

